


MAG

Retrofit Dual Flush Cistern Kit

For Concealed and Exposed Cisterns

FEATURES AND BENEFITS:

- > Suitable for Montrose and Pedigree Cisterns
- > Standard 6/3 flush volume (adjustable)
- > Easy, simple installation
- > Pneumatic Push Buttons (Air Operated)
- > Replacement outlet valve for all exposed and concealed cisterns
- > Order product code: 97001

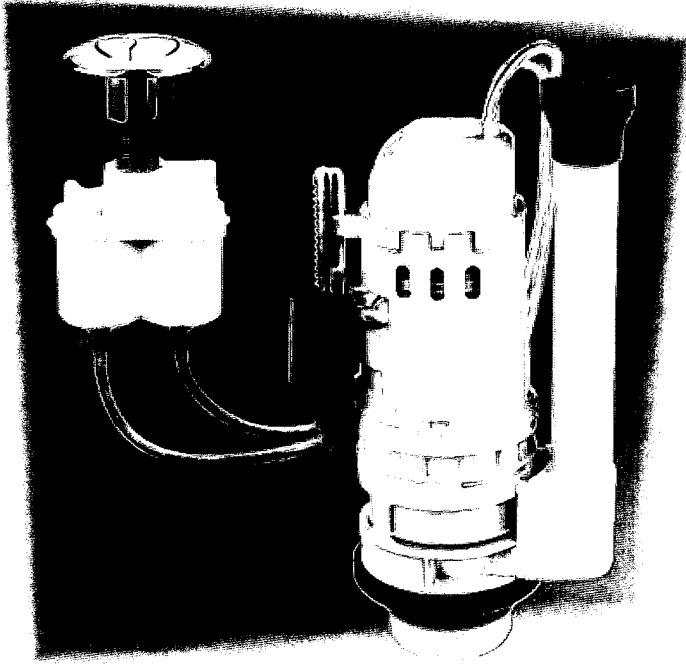


The **MAG** dual flush cistern kit is a replacement outlet cistern kit complete with pneumatic push buttons which can be retrofitted to any existing concealed or exposed cistern including the older style Pedigree and Montrose.


The flush volume is 6/3 and can be easily adjusted to increase or decrease the flush volume as required. The air-driven pneumatic push buttons can also be placed anywhere as required. For concealed cisterns, we supply, as standard, a 100mm x 80mm stainless steel panel for ease of mounting the twin buttons.

Concealed Cistern Fitting Instructions:


Please ensure these instructions are followed carefully. If you are unsure of any aspect of the installation please consult your MA Griffith representative.

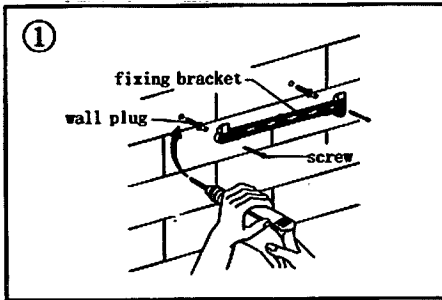


Drill two holes with diameter of 8mm and depth of 40mm as shown, and fill the bracket holes with wall plug and tighten the screws.

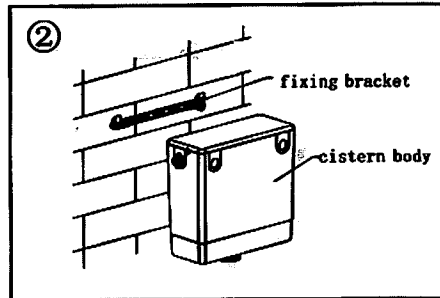


After installing the fixing bracket, put the cistern on the wall bracket

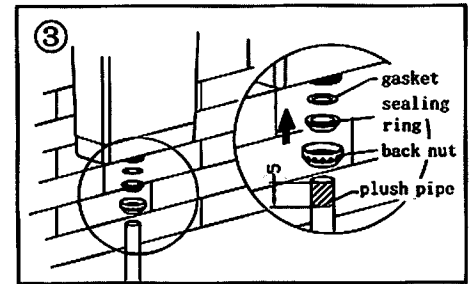


Install the back nut, sealing ring and gasket on the flush pipe, then tighten and back nut.

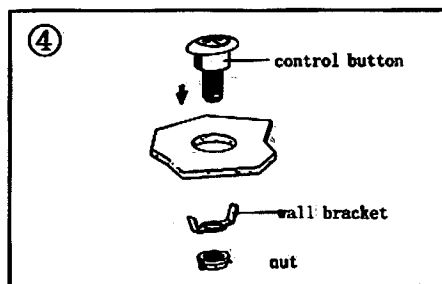


Install the button in the holes with wall hanging bracket, adjust button and fix wall bracket on the button, then tighten the back.

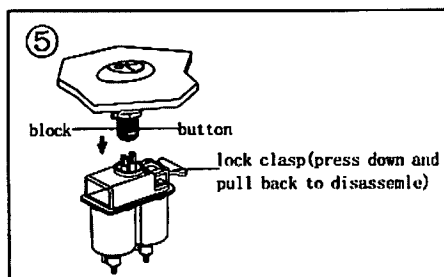


Install the fixing block into the outlet as picture shows.

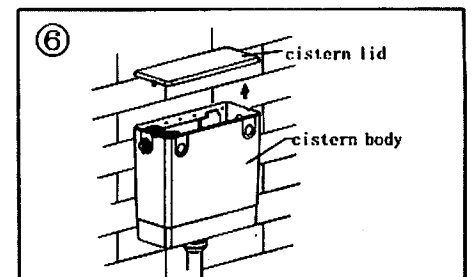


Open the tank cover.

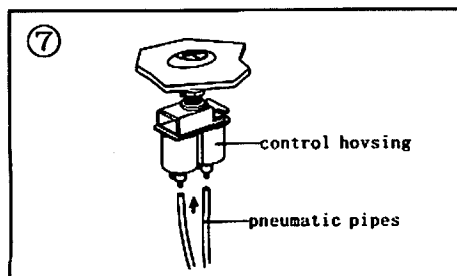


Fix the pneumatic pipes within the control housing.
Caution: Do not fold and press it.

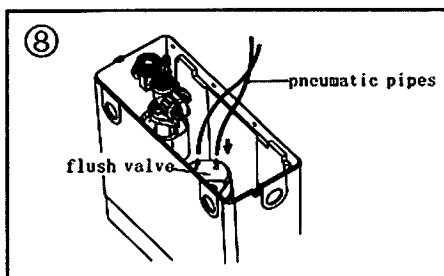


Fix the pneumatic pipes within the flush valve nozzle.
Caution: Do not fold and press it

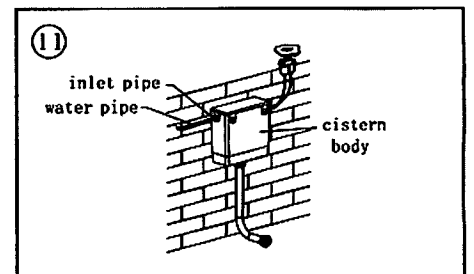

Install the water pipe to the inlet pipe of cistern for water supply.
(Inlet valves should be turned off)

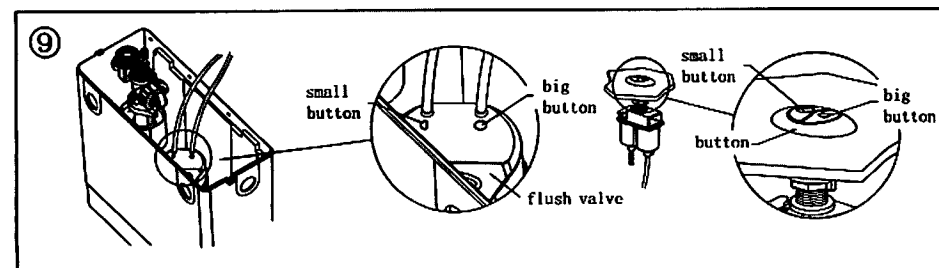

Caution: The small button and large button should be installed collectively. See diagram.

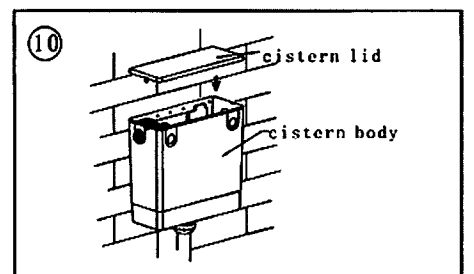

Close the cistern lid.



M.A. GRIFFITH

"Specialised Plumbing Products"

5 Willsmore Street, (PO Box 718) Williamstown Victoria 3016

T: (03) 9399 8444 F: (03) 9399 8446

E: sales@magriffith.com.au W: www.magriffith.com.au